
Detergent Pump Installation


1. Unscrew the front cover of the machine and place the peristaltic detergent pump to the position.




2. Install the Peristaltic detergent pump outlet (detergent tank injector) (to the hole that already exists) and connect this to the peristaltic pump.

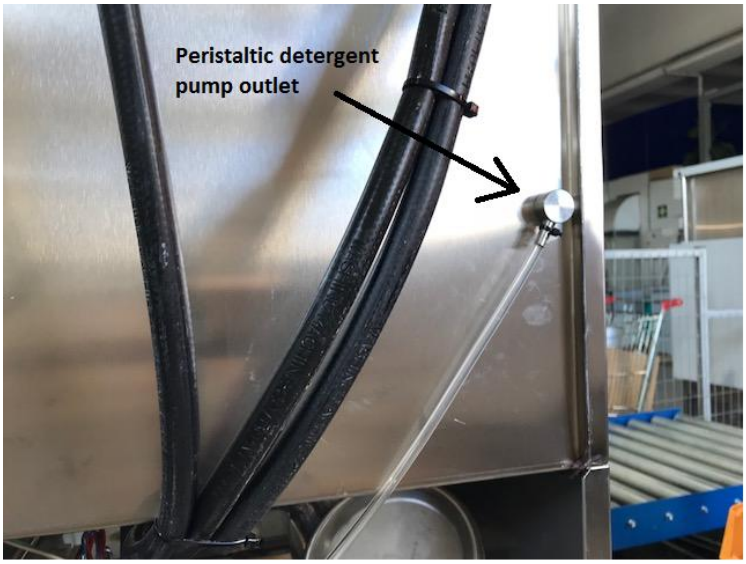

3. Detergent pump inlet (from soap container)

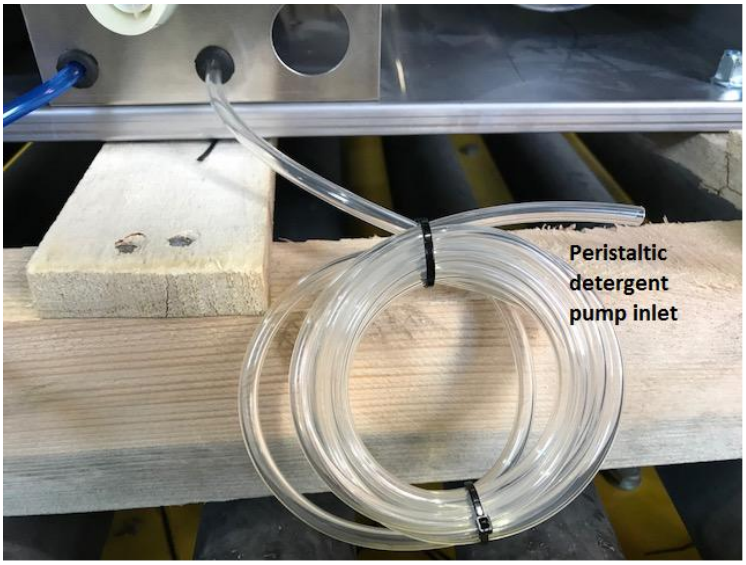

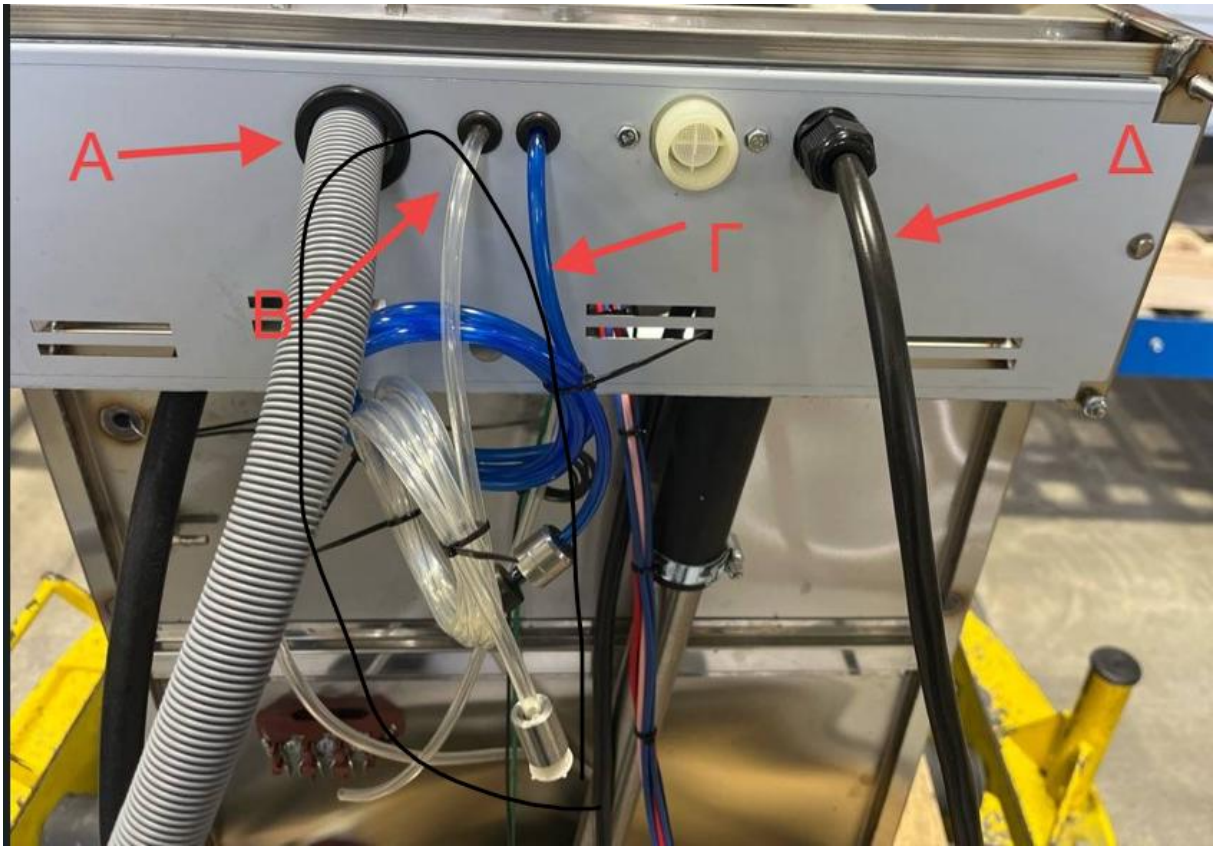

4. Detergent pump inlet and outlet.



5. Connect the 2 cables of the peristaltic pump to the 2 cables which are in white.

