7453.0022

FROZEN SNOW

CombiSteel

Self-contained ice maker up to 180 kg - Granular system

Position n°



Application fields

Hotel	●●●●●○○○	Fish market	●●●●●●○○
Restaurant	●●●○○○○○	Supermarket	●●●●●●●●
Fast food	●○○○○○○○	SPA	●●●●●●●●
Bar	●○○○○○○○	Medical	●●●●●●●●
Disco	●●●○○○○○	Industry	●●●●●○○○

Features & Plus

- Granular ice
- Low consumption (1 liter water / 1 kg ice) - aircooled vers.
- Electromechanical functionning
- Extrernal structure AISI 304 Scotch Brite
- Evaporator AISI 304, auger AISI 303 made
- Air Cooling and Water Cooling systems
- Standard and special voltages
- Insulated retractable door
- ON-OFF switch
- Dust proof water basin
- Automatic water charge
- Easy cleaning thanks to rounded surfaces
- External protective filter, removable, easy to clean
- Removable side panels
- Internal bin insulation HCFC free
- Model in Tropical Class + 43 ° C
- Conformity to RoHS directive
- Adjustable Stainless Steel feet

Prod. 24h


Air temp.	Water temp.	Prod. 24h kg
10° C	10° C	180
21° C	15° C	155
32° C	21° C	140

7453.0022

FROZEN SNOW

CombiSteel

Self-contained ice maker up to 180 kg - Granular system

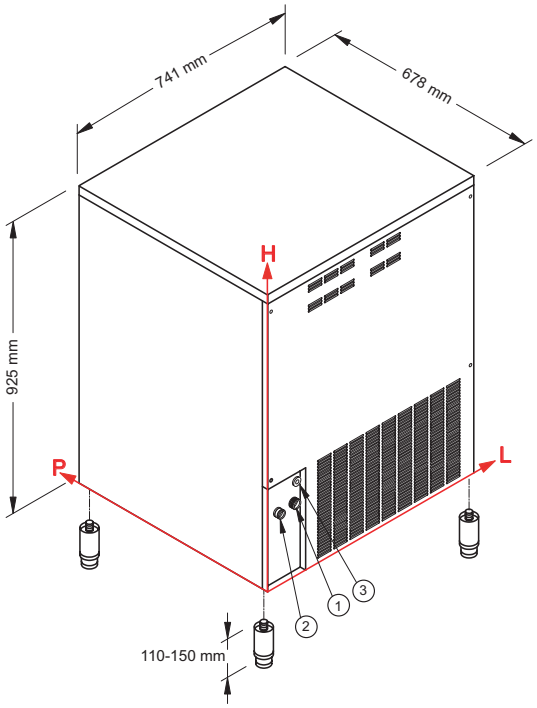

Connections

All measures are referred to the rear bottom-left corner (L-H-Ø)

① Water inlet:
120 mm - 230 mm - 3/4”

② Water outlet:
65 mm - 245 mm - 24 mm

③ Electrical connection:
130 mm - 310 mm

Working conditions

- Location: **Indoor**

	Min	Max
Ambient temperature	+10° C	+43° C
Water temperature	+3° C	+32° C
Voltage	-10%	+10%
Water inlet pressure	1bar (14 psi)	6bar (84 psi)

Technical information

Production in 24h	155 kg
Store capacity, up to	38 kg
Cooling system	A - W
Refrigerant	R404A
Standard voltage	220-240 V ~ 50 Hz
Electrical consumption	650 W
Fuse	10 A
Water consumption	A: 1 l/kg W: 6,4 l/kg
Sizes (L-P-H mm)	741 - 678 - 925
Sizes with pack (L-P-H mm)	800 - 750 - 1055
Net weight	85 kg
Gross weight	95 kg
Finish	AISI 304 stainless steel, scotch brite

All the technical information must be considered at the following conditions:

Sizes without feet

Ambient temperature +21° C

Water temperature +15° C

Electrical consumption at +43° C (standard voltage)

Models and specifications are subject to change without notice
Rev. 00 - Issued January 2017