# 7453.0030 FROZEN DICE

## Modular ice maker up to 160 kg - Sprayer system

### Position n°




### Application fields

| | | | |
|---|---|---|---|
| Hotel | ● | Fish market | ○ |
| Restaurant | ● | Supermarket | ○ |
| Fast food | ● | SPA | ○ |
| Bar | ● | Medical | ○ |
| Disco | ● | Industry | ● |

### Features & Plus

- Full cube, compact and crystalline
- Extrernal structure AISI 304 Scotch Brite
- Electromechanical functionning
- Air Cooling and Water Cooling systems
- Standard and special voltages
- Removable side panels
- ON-OFF switch
- Cabinet insulation HCFC free
- Removable and cleanable air filter
- Conformity to RoHS directive
- Easy cleaning thanks to rounded surfaces
- Model in Tropical Class + 43 ° C

### Available dice size







### Prod. 24h

| Air temp. | Water temp. | Prod. 24h kg |
|---|---|---|
| 10° C | 10° C | 160 |
| 21° C | 15° C | 155 |
| 32° C | 21° C | 132 |

### Usable Bins


- Bin 7453.0032
- Bin 7453.0038

# 7453.0030

## FROZEN DICE

CombiSteel

## Modular ice maker up to 160 kg - Sprayer system

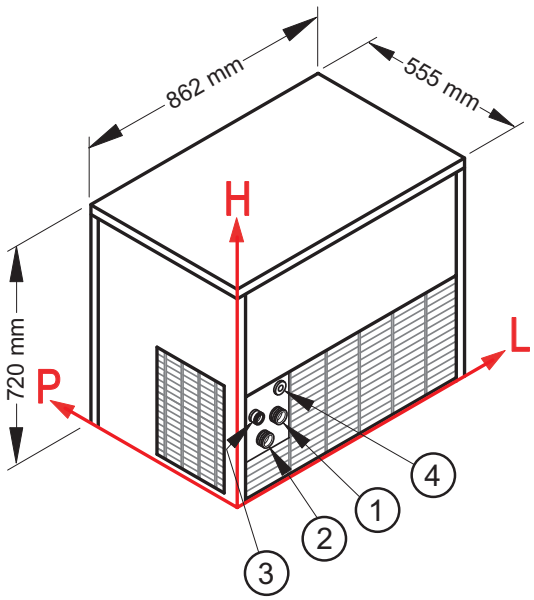


## Working conditions

- Location: **Indoor**

| | Min | Max |
|---|---|---|
| Ambient temperature | +10° C | +43° C |
| Water temperature | +3° C | +32° C |
| Voltage | -10% | +10% |
| Water inlet pressure | 1bar (14 psi) | 6bar (84 psi) |

## Technical information

| | |
|---|---|
| Production in 24h | 155 kg |
| Cooling system | A - W |
| Kind of cube | 14-**17**-32-41-60 g |
| Refrigerant | R404A |
| Standard voltage | 220-240 V ~ 50 Hz |
| Electrical consumption | 1400 W |
| Fuse | 16 A |
| Water consumption | A: 2,6 l/kg<br>W: 13 l/kg |
| Sizes (L-P-H mm) | 862 - 555 - 720 |
| Sizes with pack (L-P-H mm) | 945 - 645 - 980 |
| Net weight | 118 kg |
| Gross weight | 128 kg |
| Finish | AISI 304 stainless steel, scotch brite |

All the technical information must be considered at the following conditions:

| Standard Cube (17 g) | Ambient temperature +21° C | Water temperature +15° C | Electrical consumption at +43° C (standard voltage) |
|---|---|---|---|

## Connections

All measures are referred to the rear bottom-left corner (L-H-Ø)

① Water inlet:
126 mm - 284 mm - 3/4"

② Condenser water inlet:
94 mm - 234 mm - 3/4"

③ Water outlet:
69 mm - 297 mm - 24 mm

④ Electrical connection:
140 mm - 355 mm

② Only for water cooling systems

**Models and specifications are subject to change without notice**
Rev. 00 - Issued January 2017